

Radio sequence Basic 210

LED sequence light system self-configuring.


All the lights are the same model.


Electronic control integrated into the lights.


Standard day and night operation.

on request only night.


12V standard 230/12V input on request.

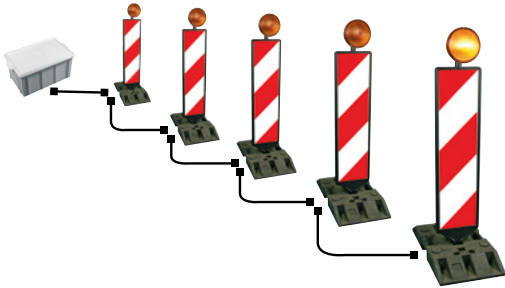


Certification EN 12352	Basic 210: L8H - L8M
Sequence type	Self-configuring
LED colour	
Input voltage	12 V
Connection cables	6 - 13 - 19 - 25 - 39 m
Power supply cable	10 m
Fixing	Panel adapter, bracket for 48 o 60 mm pole



T: cap

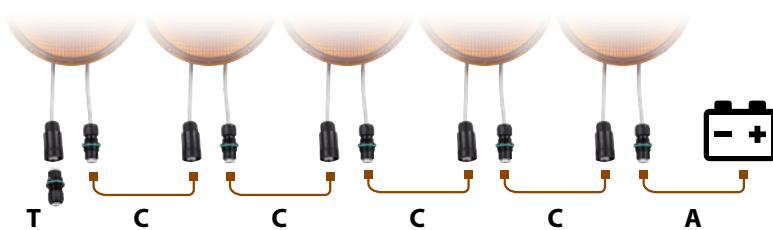

Signalling panel	
Dimensions	290 x 1330 x 50 mm
<ul style="list-style-type: none"> • Without film • With double side EG class 1 film • With double side HI class 2 film 	
	

Battery case	
Dimensions	680 x 410 x 320 mm
	

Base in recycled rubber	
Dimensions	800 x 400 x 120 mm
Weight	27 kg ±15%
	