

Impulse 102

TECHNICAL FEATURES







Description

Impulse 102 is an emergency LED kit with magnetic base, shock resistant and waterproof. Practical and portable, to be used in the road or industrial environment. Also rechargeable individually.

| OPTICAL FEATURES | | | |
|--------------------------|---|--------------------|-----|
| Light source | 16 LED | | |
| Optics | 360° | | |
| Colors | Amber | Blue | Red |
| Flashing modes | | 9 selectable modes | |
| ELECTRICAL FEATURES | | | |
| Impulse 102 power supply | Rechargable lithium-ion battery 700ma/3.7V | | |
| Charge time | 12/14 hours | | |
| Power charger | 100-240 Vac and 12/24Vdc with cigarette lighter adapter | | |
| Insulation class | Class III | | |
| FLASHING MODES | AUTONOMY | | |
| Rotate | 7 hours | | |
| Quad Flash | 7 hours | | |
| Single Blink | 50 hours | | |
| Alternating Blinks | 7 hours | | |
| SOS Rescue (Morse Code) | 12 hours | | |
| Steady on - high | 4 hours | | |
| Steady on - low | 30 hours | | |
| 2 LED Flashlight | 7 hours | | |
| 4 LED Flashlight | 5 hours | | |
| MECHANICAL FEATURES | | | |
| IP Protection Degree | IP65 | | |
| Flare weight | 210 g | | |
| Kit case weight | 3 Kg | | |
| Flare dimensions | 107 x 112 x 35 mm | | |
| Kit case dimensions | 445 x 375 x 70 mm | | |
| Flare materials | Thermoplastic rubber and polyethylene | | |
| Kit case material | Polypropylene | | |
| Fixing | Magnetic base | | |
| Operating temperature | -30 °C ÷ + 110 °C | | |









| Rev. 3.0 |
|------------|
| 09/11/2023 |





Approved TEC




Approved AQ







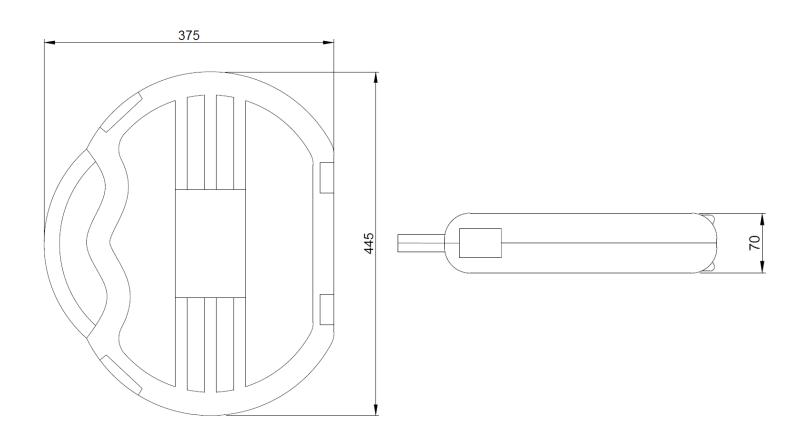

Rev. 3.0 09/11/2023



Approved TEC



Approved AQ