

# 60x60 backlit sign single-sided



## TECHNICAL FEATURES



### Description

Single-sided square backlit sign according to EN12899 L2 class.

### OPTICAL FEATURES


Light source	LEDs arranged on the 4 sides	
Optics	Single-sided	
Emission Area	0.35 m <sup>2</sup>	
Luminous intensity	300 cd	
Color	6000 K ÷ 8000 K	
Optical Group Life	> 50'000 Hours	

### ELECTRICAL FEATURES

Power Supply	12 Vdc (11 Vdc ÷ 15 Vdc)	230 Vac
Power consumption	25 W	40 W
Insulation class	Class III	Class II

### MECHANICAL FEATURES

Operating Temperature	-10 °C ÷ +55 °C	
IP Protection Degree	IP54	
Weight	10 Kg	
Dimensions	650 x 740 x 50,5 mm (without collars)	
Film	Transucent Class 2	
Connection	2x1 mm <sup>2</sup> cable H07RN length 3.5 meters	
Fixing	90 mm collars for omega guides (included)	

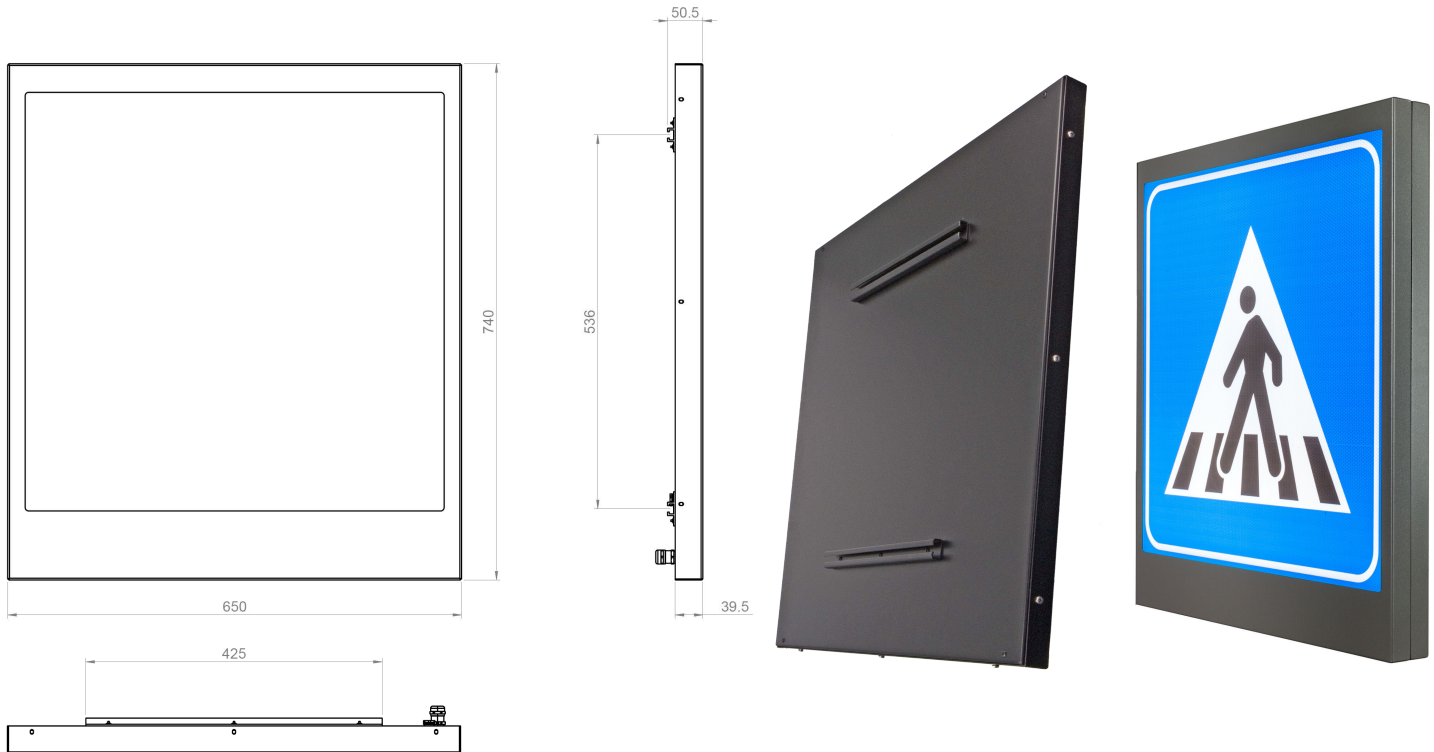

Rev. 3.0  
18/12/2023

Approved TEC

Approved AQ