

# 90x90 SLIM backlit sign double-sided

## TECHNICAL FEATURES



### Description

Double-sided square backlit sign according to EN12899 L2 class. The device includes a connector which it is possible to connect to 1 or 2 Trilogy LED luminaires.

### OPTICAL FEATURES


Light source	LEDs arranged on the 4 sides	
Optics	Double-side	
Emission Area	0.8 m <sup>2</sup>	
Luminous intensity	590 cd	
Color	6000 K ÷ 8000 K	
Optical Group Life	> 50'000 Hours	

### ELECTRICAL FEATURES

Power Supply	12 Vdc (11 Vdc ÷ 15 Vdc)	230 Vac
Power consumption	48 W	54 W
Insulation class	Class III	Class II

### MECHANICAL FEATURES

Operating Temperature	-10 °C ÷ +55 °C	
IP Protection Degree	IP54	
Weight	29 Kg	
Dimensions	1000 x 1140 x 63 mm	
Film	Transucent Class 2	
Connection	2x1 mm <sup>2</sup> cable H07RN length 3.5 meters	
Fixing	Arrangement for portal mounting (brackets not included)	

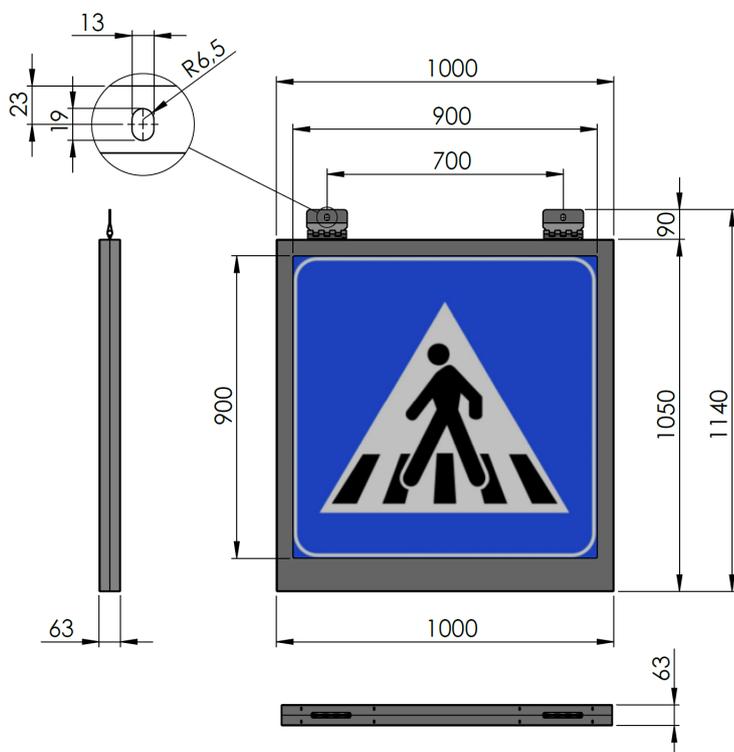

Rev. 3.0 18/12/2023		Approved TEC		Approved AQ
------------------------	--	--------------	--	-------------